


USER'S GUIDE



PaviFLEX
GYM FLOORING

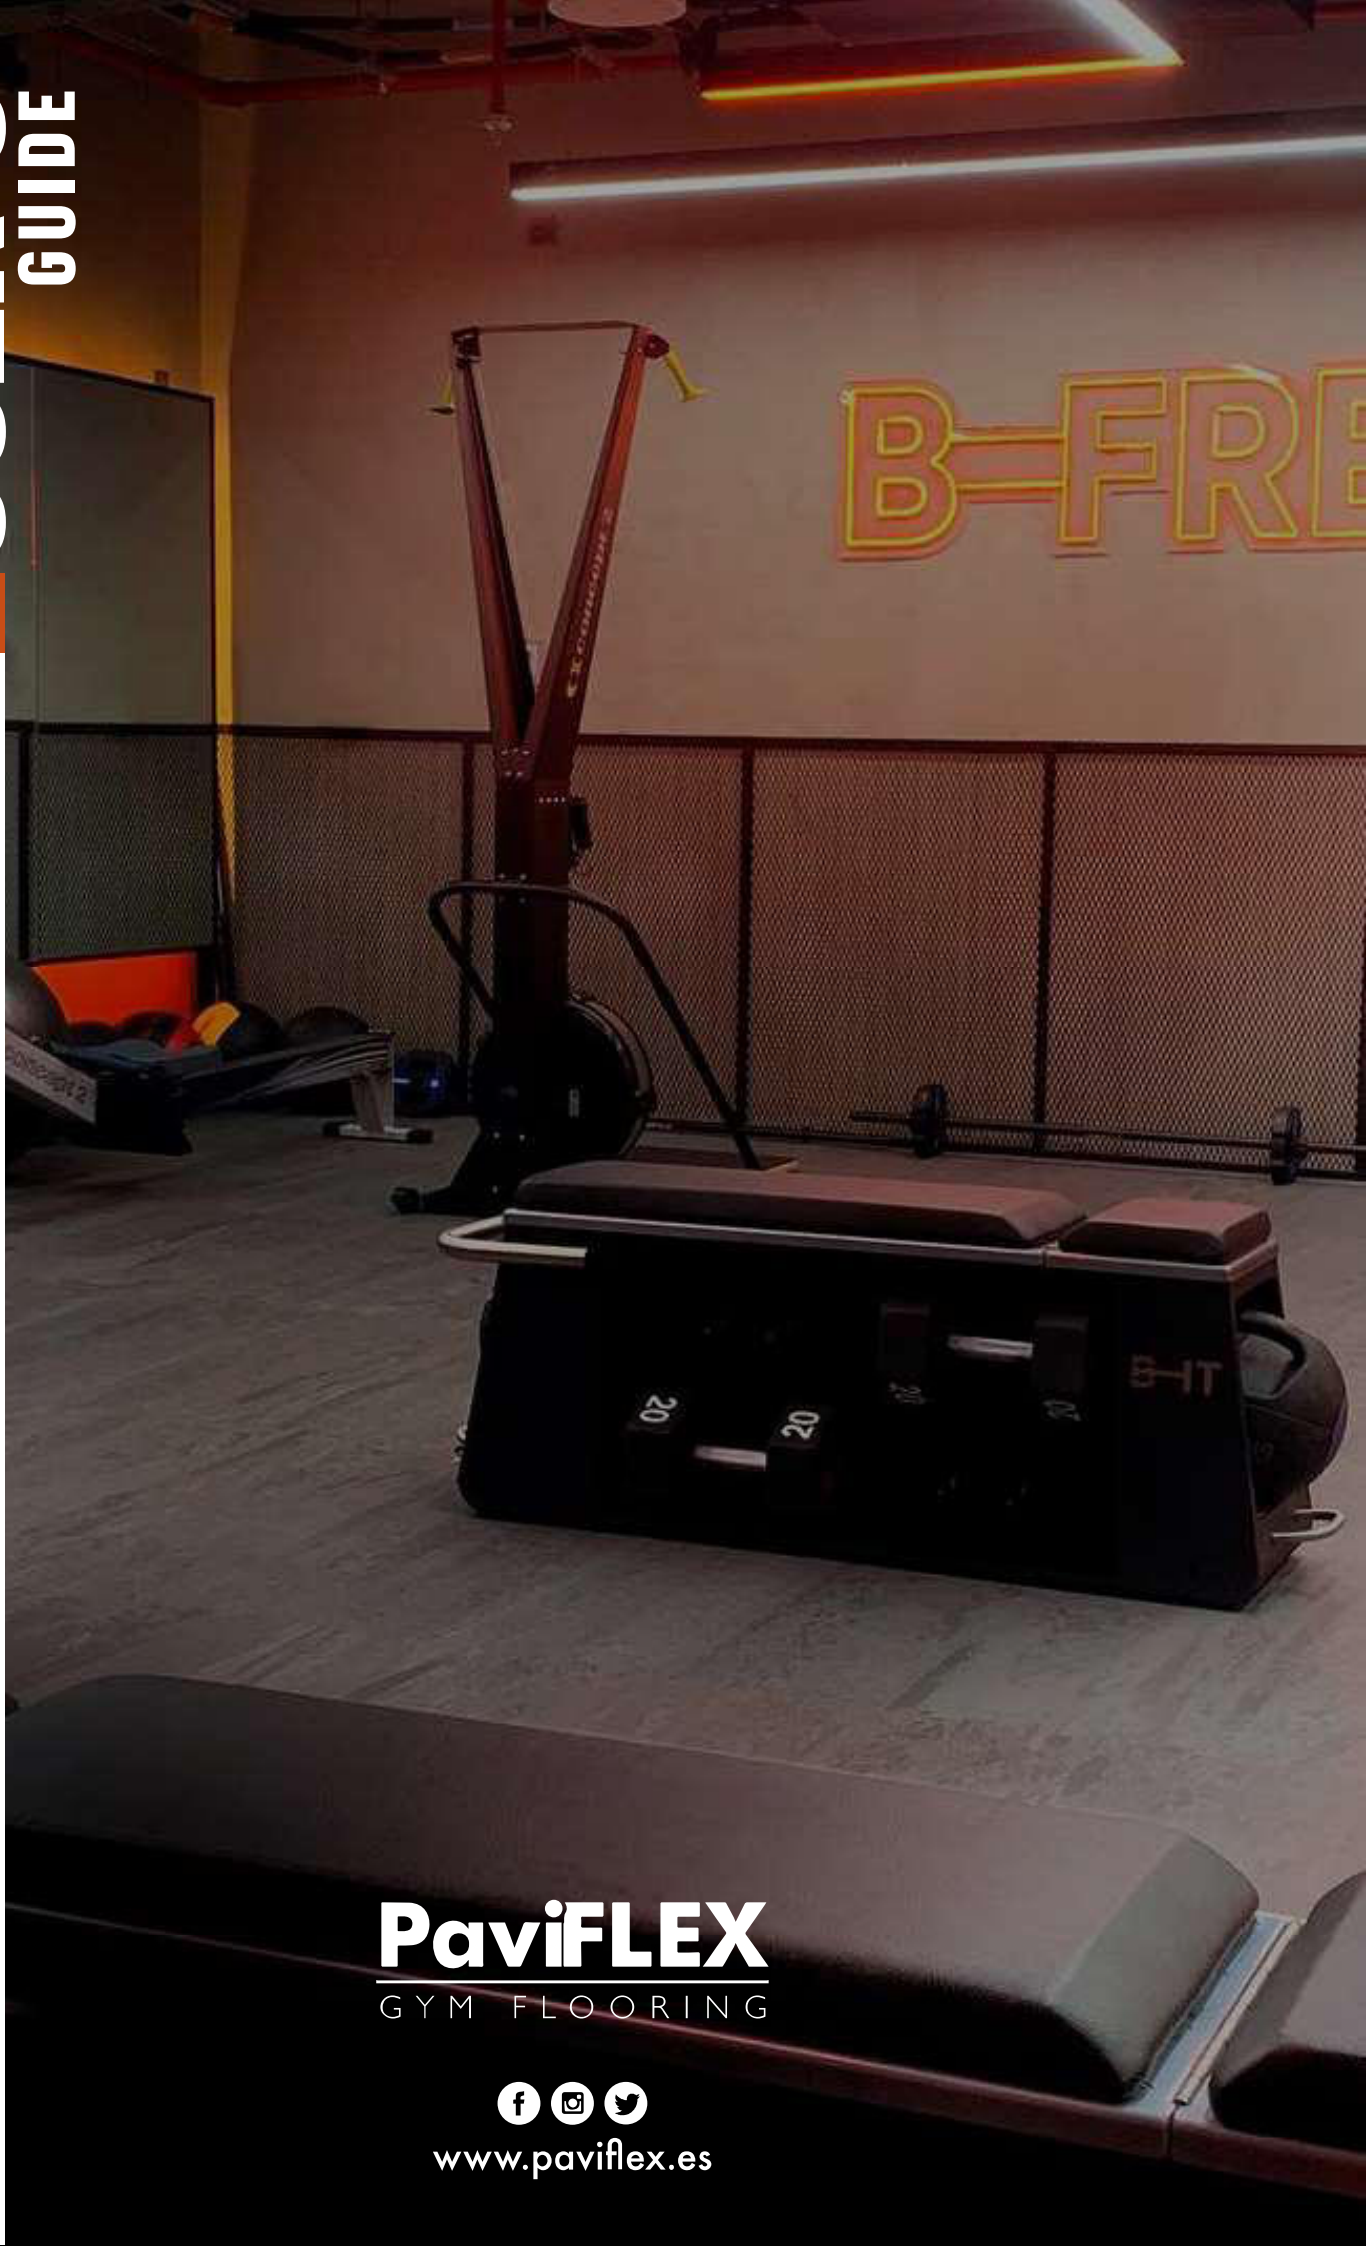

www.paviflex.es



DEAR CUSTOMER,

Thanks for choosing PaviFLEX.

We are very pleased to be part of your Fitness equipment. We are committed to provide nothing but an excellent product at a reasonable price, accurate on-time deliveries, and the customer service that you deserve.

For any queries you can always contact us by telephone: +34 965403300 or by email: info@paviflex.es. Our customer service staff will always be there to assist you.

Thanking you again for choosing PaviFLEX as your Gym Flooring and Mats. It will always be our pleasure to provide you with the best.

Yours truly, PaviFLEX Team.

BEFORE INSTALLING

1st STEP

When the flooring is received, please keep in mind that during the transportation the product might have been damaged.

Please check it carefully before handling. Due to possible temperature variations during the haulage, we recommend leaving the product in the room where it is going to be installed, for at least 24 hours before the works.

Please check that the flooring has no defects. If so, you should notify PaviFLEX about the incidence, either by phone +34 965403300 or by email info@paviflex.es and agree a solution with us for the damaged tiles before start installing.

**DISCOVER
WHAT
MAKE US
DIFFERENT**

INSTALLATION

HOW TO INSTALL

2nd STEP

SURFACE

The surface where PaviFLEX is going to be installed must be solid, flat, and clean.

PaviFLEX can be fixed on any type of surface (concrete, wood, stone, etc.).

INSTALLATION

As simple and easy as interlocking the puzzle mats, PaviFLEX do not need to be glued to the floor providing by this way and extra shock absorption and energy rebound at training time.

We will place the puzzle tiles in the setting up area and start interlocking them from the center of the room outwards in the clockwise direction. When reaching the walls or columns, the tiles must be cut straight (we can also supply straight tiles) and a free gap must be left between the tiles and the walls or columns.


FREE GAP

Our product absorbs impact and return the energy when training, so it works. To provide the best performance, it is essential that a dilation free space is left between the tiles and the walls or columns. The dilation margin will depend on the sqm dimension of the setting up area (Approx. 2mm per lineal meter). If such free margin is not taken into consideration, tiles could put up due to expansion and contraction.

Once the flooring has been properly installed, we will place the equipment and check that the dilation margin remains. In case that the free margin has been reduced due to the equipment weight, we will have to cut again the external tile edges to keep the 2cm margin of dilation.


WARNING: It is strictly not recommended attaching any structure to the flooring surface that requires screwing.

CUTFLEX PRO ULTIMATE TECHNOLOGY AUTOMATIC CUTTING MACHINES

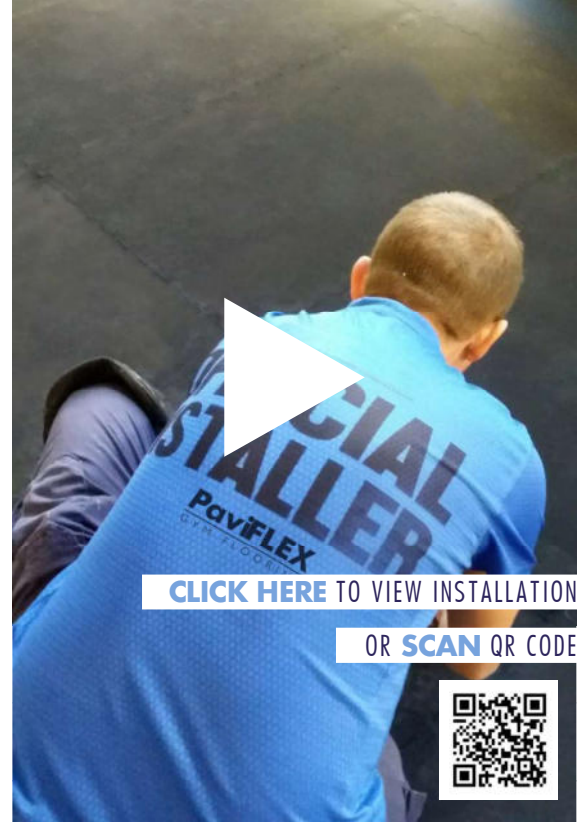

EASY INSTALLATION

WARNING: PaviFLEX products under a high level of sun exposure, may undergo a color tone variation or malformation. In case the area is besides a window with no solar filter, we will have to somehow avoid the sun light directly heating the tiles. All our products, except TurFLEX & Out XTREMEeco are for indoor use only.


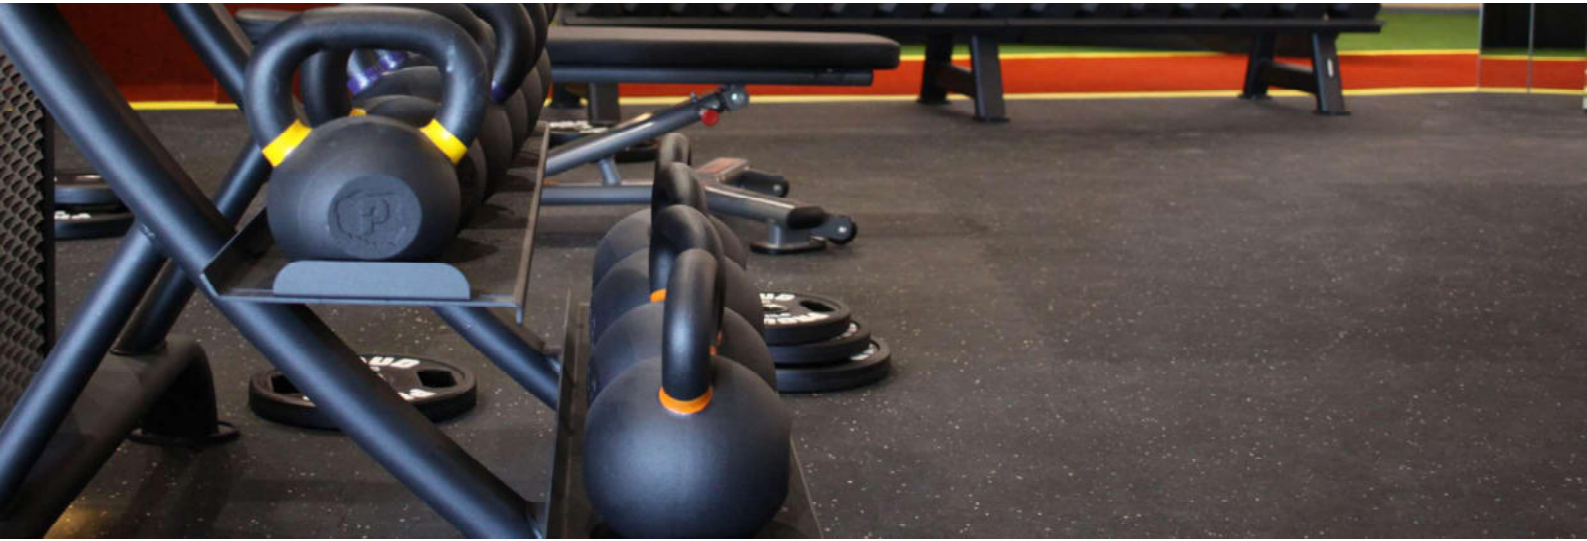


ECO FLOORING CORRECT PLACEMENT


ECO INSTALLATION

The correct placement of our ECO flooring during the installation will avoid black color-scheme differences due to the light reflection.

To avoid this, all flooring tiles should be placed with the orientation marking in the same position as shown in the layout plan below.



TOP SIDE

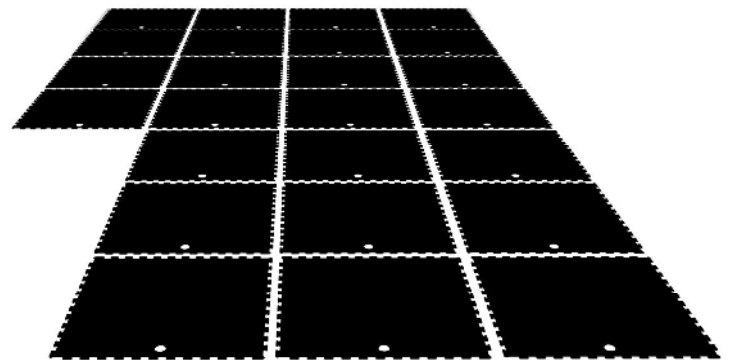


* Installation diagram at the bottom

PLEASE NOTE:

The orientation marking is located on the **BOTTOM** side.

BOTTOM SIDE



ORIENTATION
MARKING

MAINTENANCE CLEANING



Pav'FLEX
GYM FLOORING



www.paviflex.e

PaviFLEX 7


MATERIAL



VACUUM



BUCKET



WARM WATER

MICROFIBRE MOP (x3)



STIFF BRUSH (Medium strength bristles)



CLOTH



JONTEC FORWARD or similar (F)
DO **NOT USE** ON EVA FLOORING



JONTEC TENSOL or similar (T)

OR



SCRUBBER DRYER



WHITE CONTACT PAD* (for post-installation & daily cleaning)



RED CONTACT PAD* (for deep cleaning)

● **ATTENTION:** DO **NOT USE** ABRASSIVE PRODUCTS.

POST-INSTALLATION

fo t us

● The Scrubber drier can be used for these steps.

- Vacuum
- 50 ml Jontec FORWARD for each liter of solution. (1L per 15m²)
(DO **NOT USE** ON EVA FLOORING)
- Apply with microfibre mop. Use different mops for different products (including water).
- Wait 10 min. Don't allow it to dry.
- Rinse well with clean warm water as many times as necessary to ensure elimination
- Leave to dry completely.
- Perform DAILY CLEANING

DAILY CLEANING

For daily cleaning

● The Scrubber drier can be used for these steps.

- Vacuum
- 25 ml Jontec TENSOL for each liter of solution. (1L per 25m²)
- Apply with microfibre mop. Use different mops for different products (including water).
- Leave to dry completely.

DEEP CLEANING

For intensive cleaning*

● The Scrubber drier can be used for these steps.

● *In case of specific stains such as: dried cement, plaster, etc. Please contact: info@pavilex.es

- Vacuum
- 200 ml Jontec FORWARD for each liter of solution. (1L per 15m²)
(DO **NOT USE** ON EVA FLOORING)
- Apply with microfibre mop. Use different mops for different products (including water).
- Wait 5 min. Don't allow it to dry.
- Scrub the solution
- Wait 5 min. Don't allow it to dry.
- Rinse well with clean warm water as many times as necessary to ensure elimination
- Leave to dry completely.

PAVIFLEX GUARANTEE

P **iFLEX**
GYM FLOORING

The validity of the guarantee would exclusively be applicable against manufacturing defects and only under the enclosed guarantee terms with a duration of 2 years from the selling date and always whenever the guideline for handling, installation and use have been respected.

It is mandatory to notify us any manufacturing defect by writing within 30 days after receipt of the material. Otherwise, the guarantee will become null and void.



HANDLING AND RECEIPT OF THE MERCHANDISE:

The merchandise must not be exposed to the sun light, direct rain, or temperatures over 40°C. Before the installation, the manufacturer must be advised of any noticeable defects on the sheet surface. The duty of the manufacturer is replacing the damaged sheets. Due to the manufacturing process, the tiles might show a slight variation in color or sheen on their surface which should not be in any case considered as a defect.

HOW TO INSTALL:

Installation grounds:

The surface / ground where the paving is going to be installed must be completely flat and smooth to avoid any intervals when assembling the pieces together.

Temperature:

The paving cannot be exposed to temperatures over 40°C.

Sun exposure:

The areas exposed to a higher level of sun exposure can undergo changes such as loss of sheen, etc...In case that the installation is located besides a window or any other area where the sunlight exposure would affect the paving, it must somehow be protected to avoid the tiles getting into temperatures higher than 40 °C.

All our rubber products (except TurFLEX) are indoors as for an outdoor use they could undergo changes in color or malformation.

These products are subject to a minimum expansion and contraction due to temperature conditions.

As a general specification, when installing the flooring a dilation free space have to be left between the tiles and the walls or columns. The dilation margin will depend on the sqm dimension of the setting up area (Approx. 2mm per lineal meter). If such free margin is not taken into consideration, tiles could put up due to expansion and contraction.

Assembling steps:

The easiest way to make sure that the installation is carried out in the correct way, is starting the installation from the center going outwards filling the area in a clockwise radial order. To adjust the sheets in the end areas or those located against a wall or pillar, a cutting line must be marked, making a small incision with a knife going over it by several times.

WARNING: It is strictly NOT recommended attaching any structure to the flooring surface that requires screwing.

TERMS OF USE:

PaviFLEX Gym Flooring is a product with exclusive application to sport activities, and consequently stepping on should be made with proper sport shoes, with rubber soles except for PaviFLEX Tatami (designed for Martial Arts and Stretching) as well as PaviFLEX Junior (designed for children's playgrounds) which are to be used barefoot.

PaviFLEX Tatami & PaviFLEX Junior are not resistant to any structures or machinery. Special care should be taken by not unloading heavy merchandise with sharp ends that could eventually mark and break the surface, not recovering its original appearance.

The guarantee would become null and voided whenever any of the terms previously exposed have not been complied such as using the wrong footwear, using abrasive cleaning products, and/or giving the flooring a use other than the one for which it has been designed for.